


LISA[®] 22 ELECTRIC SILVER LOOK

NEW



Color: F53 SILVER LOOK
with PLUS DIGITAL THERMOSTAT

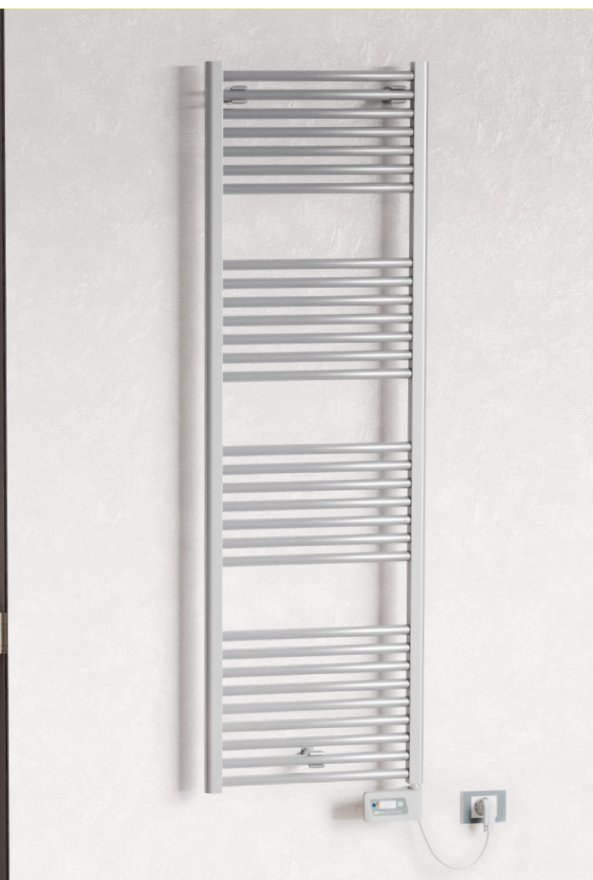

MATERIAL:

- 30x40 mm semi oval vertical collectors in painted mild steel.
- ø 22 mm horizontal heating elements in painted mild steel.
- Heat transfer fluid.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.

PACKING:

Cardboard angular and profiles protected by a recyclable film in polyethylene.

User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders.
Certificate DIN 55900-1,-2.

COLOR:

F53 SILVER LOOK.

ELECTRICAL RESISTORS:

Electrical resistors with grey digital thermostat - Class 1 - IP44.
6 main functions: comfort, night, antifreeze, chrono, 2H timer and standby.



COLOR GREEN

ELECTRICAL ONLY

☒ With digital thermostat

CERTIFICATIONS



OPTIONAL



"PLUS" THERMOSTAT REMOTE CONTROL IR

Remote control of PLUS
digital chrono-thermostat
functioning

Art. nr. 5150990000012

FEATURES


Electrical resistors: CLASS 1

Minimum ingress protection: IP 44


Wire lenght: 1200 mm with Schuko plug

Power supply: 230 Vac 50/60 Hz

Seasonal energy efficiency η_s : 38% (with PLUS DIGITAL THERMOSTAT)

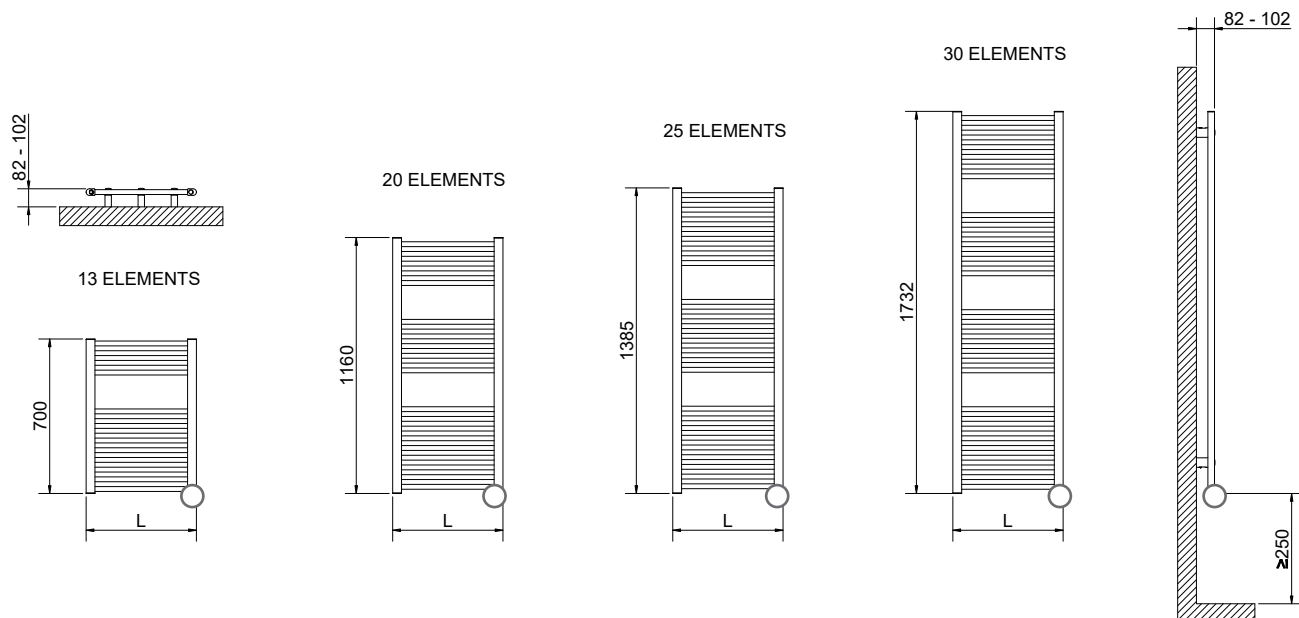


○ The total height has to be calculated considering the thermostat height.

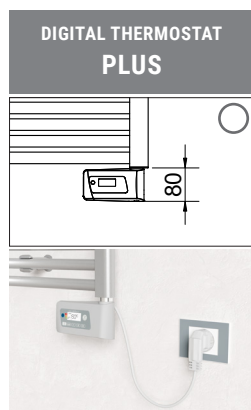

LISA® 22 SILVER LOOK ELECTRIC PLUS

Height	Width	Art. nr.	Output	Weight
[mm]	L [mm]	Silver Look F53	[Watt]	[Kg]
700	400	3581646100040	300	7,4
	500	3581646100041	400	8,4
1160	400	3581646100042	400	11,2
	450	3581646100043	500	11,9
1385	500	3581646100044	600	12,7
	400	3581646100045	500	13,4
1732	500	3581646100046	700	15,3
	500	3581646100047	900	18,4

Cordivari ErP electric radiators are characterised by high efficiency. These models comply with EU Regulation 2024/1103. The seasonal energy efficiency of these fixed electric space heating appliances, with nominal Thermal output >250 W, is over 46% in all models. Each of the ErP electric radiators is equipped with at least electronic temperature control, window opening detection, weekly programming and stand-by power consumption <0.5 W (or 2.0 W in Wi-Fi mode, where applicable).



HOW TO PLACE ELECTRIC RADIATORS

The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.
In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.