

LISA[®] 22 SILVER LOOK

NEW

 **5 YEARS** WARRANTY



Color: **F53** SILVER LOOK

MATERIAL:

- 30x40 mm semi oval collectors in painted mild steel.
- Ø 22 mm horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.

PACKING:

Cardboard angular and profiles protected by a recyclable film in polyethylene. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders. Certificate DIN 55900-1,-2.



COLOR:

F53 SILVER LOOK

AVAILABLE FUNCTIONS

- ☒ Hot water
- ☒ Electric
- ☒ Dual energy

CERTIFICATIONS



FEATURES

Max pressure: **8 bar**

Max temperature: **110°C**

Functioning: **Hot water**


Connections: **n° 2 da 1/2" G - 1 da 1/2" G**

ACCESSORIES




**Total Color
Kristal Valve**


For information about Kristal valves, see **RADIATORS AND TOWEL RAILS CATALOGUE**




Detail of the 50 mm
pipe centres version.




13 ELEMENTS





20 ELEMENTS

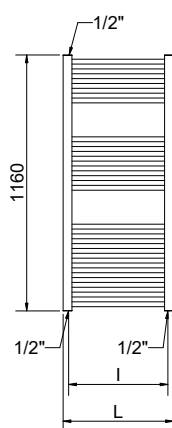

25 ELEMENTS

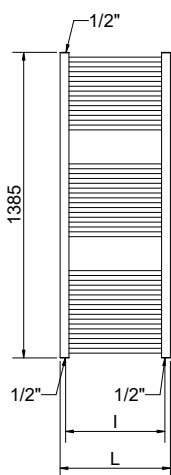

30 ELEMENTS

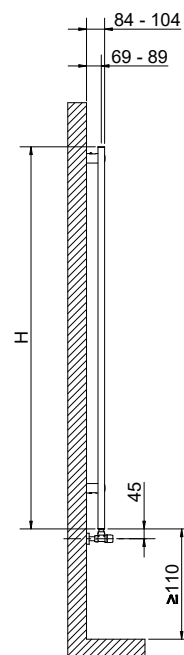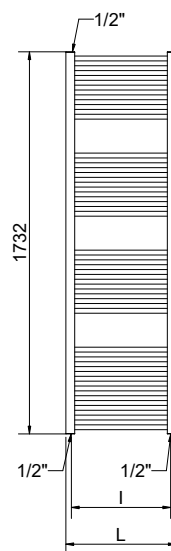

LISA® 22 SILVER LOOK

PIPE CENTRES 50 mm

Thermal output

Height	Width	Pipe Centres	Art. nr.	Art. nr.	Dry weight	Surface	Water content	Δt 50°C	Δt 30°C	Exponent	Dual energy kit
[mm]	L [mm]	I [mm]	Silver Look F53	Silver Look F53	[Kg]	[m²]	[lt]	[Watt]	[Watt]	n	[Watt]
700	400	350	3551640005277	3551640005301	3,8	0,46	2,6	257	137	1,22270	-
	450	400	3551640005278	3551640005302	4,0	0,51	2,9	282	150	1,22320	300
	500	450	3551640005279	3551640005303	4,3	0,55	3,1	306	163	1,22371	300
	550	500	3551640005280	3551640005304	4,6	0,60	3,3	330	176	1,22421	300
	600	550	3551640005281	3551640005305	4,9	0,64	3,5	355	189	1,22472	300
	750	700	3551640005282	3551640005306	5,7	0,75	4,1	427	228	1,22623	400
1160	400	350	3551640005283	3551640005307	6,0	0,73	4,2	408	216	1,23621	400
	450	400	3551640005284	3551640005308	6,4	0,80	4,5	448	238	1,23736	400
	500	450	3551640005285	3551640005309	6,8	0,87	4,9	487	258	1,23852	500
	550	500	3551640005286	3551640005310	7,2	0,94	5,2	526	279	1,23967	500
	600	550	3551640005287	3551640005311	7,6	1,01	5,5	565	299	1,24082	500
	750	700	3551640005288	3551640005312	8,9	1,18	6,5	683	361	1,24428	700
1385	400	350	3551640005289	3551640005313	7,3	0,90	5,2	509	272	1,22627	500
	450	400	3551640005290	3551640005314	7,8	0,99	5,6	558	297	1,22868	500
	500	450	3551640005291	3551640005315	8,3	1,07	6,0	606	323	1,23108	600
	550	500	3551640005292	3551640005316	8,8	1,16	6,4	655	348	1,23349	600
	600	550	3551640005293	3551640005317	9,3	1,25	6,8	703	373	1,23589	700
	750	700	3551640005294	3551640005318	10,9	1,45	8,0	849	449	1,24311	700
1732	400	350	3551640005295	3551640005319	8,9	1,10	6,3	634	334	1,25108	600
	450	400	3551640005296	3551640005320	9,5	1,20	6,8	695	367	1,24984	700
	500	450	3551640005297	3551640005321	10,1	1,31	7,3	756	399	1,24860	700
	550	500	3551640005298	3551640005322	10,8	1,41	7,8	817	432	1,24736	700
	600	550	3551640005299	3551640005323	11,4	1,51	8,3	878	464	1,24613	900
	750	700	3551640005300	3551640005324	13,3	1,76	9,8	1062	562	1,24241	1000

For output at different Δt than 50°C, please refer to the following formula: desired output = output at Δt 50°C x (desired Δt/50)ⁿ