

LISA[®] 22 TELA

NEW

 **5 YEARS** WARRANTY



Color: **T15** TELA

MATERIAL:

- 30x40 mm semi oval collectors in painted mild steel.
- ø 22 mm horizontal heating elements in painted mild steel.

FIXING KIT:

Brackets, hex key, airvent, dowels and screws suitable for use on solid walls or perforated bricks, assembly instructions.

PACKING:

Cardboard angular and profiles protected by a recyclable film in polyethylene. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy powders. Certificate DIN 55900-1,-2.

COLOR:

T15 TELA

AVAILABLE FUNCTIONS

- ☒ Hot water
- ☒ Dual energy

FEATURES

Max pressure: **8 bar**

Max temperature: **110°C**

Functioning: **Hot water**

Connections: n° 2 da 1/2" G - 1 da 1/2" G

CERTIFICATIONS




ACCESSORIES




**Total Color
Kristal Valve**


For information about Kristal valves, see **RADIATORS AND TOWEL RAILS CATALOGUE**




Detail of the 50 mm
pipe centres version.




13 ELEMENTS





20 ELEMENTS

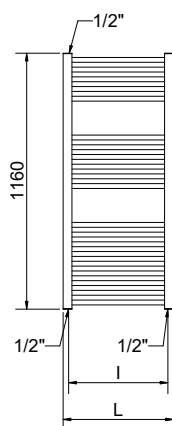

25 ELEMENTS

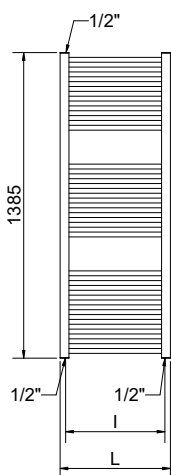

30 ELEMENTS

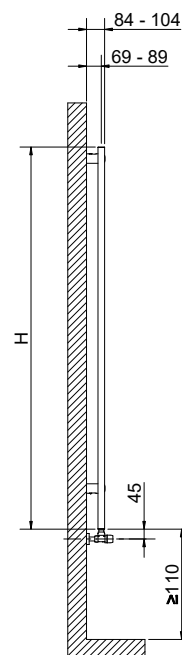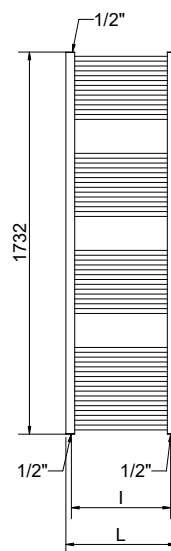

LISA® 22 TELA T15

PIPE CENTRES 50 mm

Thermal output

Height	Width	Pipe Centres	Art. nr.	Art. nr.	Dry weight	Surface	Water content	Δt 50°C	Δt 30°C	Exponent	Dual energy kit
[mm]	L [mm]	I [mm]	Tela T15	Tela T15	[Kg]	[m²]	[lt]	[Watt]	[Watt]	n	[Watt]
700	400	350	3551640005373	3551640005397	3,8	0,46	2,6	257	137	1,22270	-
	450	400	3551640005374	3551640005398	4,0	0,51	2,9	282	150	1,22320	300
	500	450	3551640005375	3551640005399	4,3	0,55	3,1	306	163	1,22371	300
	550	500	3551640005376	3551640005400	4,6	0,60	3,3	330	176	1,22421	300
	600	550	3551640005377	3551640005401	4,9	0,64	3,5	355	189	1,22472	300
	750	700	3551640005378	3551640005402	5,7	0,75	4,1	427	228	1,22623	400
1160	400	350	3551640005379	3551640005403	6,0	0,73	4,2	408	216	1,23621	400
	450	400	3551640005380	3551640005404	6,4	0,80	4,5	448	238	1,23736	400
	500	450	3551640005381	3551640005405	6,8	0,87	4,9	487	258	1,23852	500
	550	500	3551640005382	3551640005406	7,2	0,94	5,2	526	279	1,23967	500
	600	550	3551640005383	3551640005407	7,6	1,01	5,5	565	299	1,24082	500
	750	700	3551640005384	3551640005408	8,9	1,18	6,5	683	361	1,24428	700
1385	400	350	3551640005385	3551640005409	7,3	0,90	5,2	509	272	1,22627	500
	450	400	3551640005386	3551640005410	7,8	0,99	5,6	558	297	1,22868	500
	500	450	3551640005387	3551640005411	8,3	1,07	6,0	606	323	1,23108	600
	550	500	3551640005388	3551640005412	8,8	1,16	6,4	655	348	1,23349	600
	600	550	3551640005389	3551640005413	9,3	1,25	6,8	703	373	1,23589	700
	750	700	3551640005390	3551640005414	10,9	1,45	8,0	849	449	1,24311	700
1732	400	350	3551640005391	3551640005415	8,9	1,10	6,3	634	334	1,25108	600
	450	400	3551640005392	3551640005416	9,5	1,20	6,8	695	367	1,24984	700
	500	450	3551640005393	3551640005417	10,1	1,31	7,3	756	399	1,24860	700
	550	500	3551640005394	3551640005418	10,8	1,41	7,8	817	432	1,24736	700
	600	550	3551640005395	3551640005419	11,4	1,51	8,3	878	464	1,24613	900
	750	700	3551640005396	3551640005420	13,3	1,76	9,8	1062	562	1,24241	1000

For output at different Δt than 50°C, please refer to the following formula: desired output = output at Δt 50°C x (desired Δt/50)ⁿ